




**OBS. Typritning.**  
**Mät ej på ritningen**

| Dimensioner / Typ / Kapacitet |   |                                      |                            |                             |   |
|-------------------------------|---|--------------------------------------|----------------------------|-----------------------------|---|
| Storlek/<br>Typ<br>(ø mm)     | Stål-<br>kvalitet<br>(N/mm <sup>2</sup> ) | Stål-<br>areal<br>(mm <sup>2</sup> ) | Flyt-<br>kapacitet<br>(kN) | Brott-<br>kapacitet<br>(kN) | Dim.kap.<br>0,60 x F <sub>u</sub><br>(kN) |
| ø75 W                         | 835/1035                                  | 4418                                 | 3689                       | 4573                        | 2744                                      |
| ø65 W                         | 835/1035                                  | 3318                                 | 2771                       | 3434                        | 2061                                      |
| ø57 W                         | 835/1035                                  | 2581                                 | 2155                       | 2671                        | 1603                                      |
| ø47 WR                        | 950/1050                                  | 1735                                 | 1650                       | 1822                        | 1094                                      |
| ø40 WR                        | 950/1050                                  | 1257                                 | 1190                       | 1320                        | 792                                       |
| ø36 WR                        | 950/1050                                  | 1018                                 | 960                        | 1070                        | 642                                       |
| ø32 WR                        | 950/1050                                  | 804                                  | 760                        | 845                         | 507                                       |
| ø26 WR                        | 950/1050                                  | 552                                  | 525                        | 580                         | 348                                       |

| Mått för förankring och borrhål |                                  |                                |              |   |
|---------------------------------|----------------------------------|--------------------------------|--------------|---|
| Storlek/<br>Typ<br>(ø mm)       | Förankringsplatta<br>Dim<br>(mm) | Koniskmutt<br>Tjocklek<br>(mm) | Höjd<br>(mm) | Min. borrhål<br>Utan skarvhylsa<br>(mm) |
| ø75 W                           | 370 x 370                        | 80                             | ca 105*      | 165                                     |
| ø65 W                           | 325 x 325                        | 70                             | ca 100*      | 150                                     |
| ø57 W                           | 285 x 285                        | 65                             | ca 90*       | 150                                     |
| ø47 WR                          | 260 x 260                        | 50                             | ca 110       | 124                                     |
| ø40 WR                          | 220 x 220                        | 45                             | ca 70        | 109                                     |
| ø36 WR                          | 200 x 200                        | 45                             | ca 65        | 109                                     |
| ø32 WR                          | 180 x 180                        | 40                             | ca 60        | 100                                     |
| ø26 WR                          | 150 x 150                        | 35                             | ca 50        | 94                                      |

\* Bull nose mutter, 30°

Tvärsnitt av den fria längden

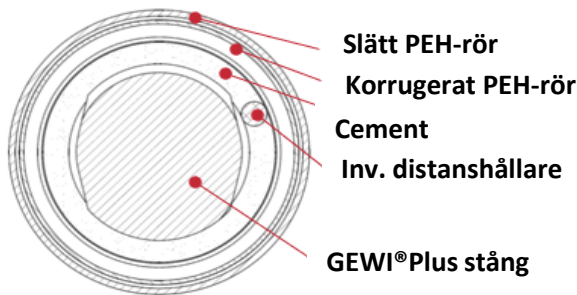

Tvärsnitt av förankringslängden

